


- ◆ MODEL NAME : POWER ATTENUATOR
100WATT -30dB
- ◆ MODEL No. : S630-215
- ◆ FREQUENCY : DC ~ 3000MHz

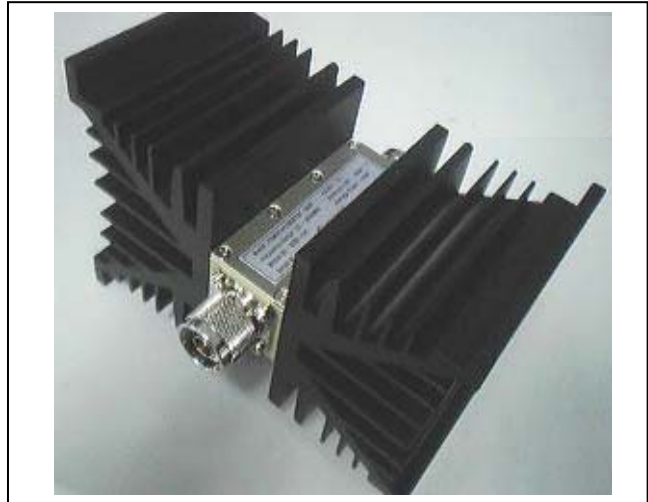

SPECIFICATION

Frequency Range	DC ~ 3000 MHz
V.S.W.R	1.2:1 (max.)
Insertion Loss	-30 dB ± 0.5(max.)
Average Power	100WATT
Temperature	-55 + 125
Mating life	500 Min.
Panel mounting torque	10+2N.m
Materials and Finish	
Center Contact	: Beryllium/Gold plate
Body	: Brass/SUCO plate
Insulator	: PTFE Teflon
Gasket	: Silicon Rubber
BASE	:aluminum

[unit:mm]


● **Manufacture Country**
KOREA

● **Manufacture Company**
SEOUL TELCOM
RF / MICROWAVE

<http://www.seoultelcom.com>

E-MAIL : sales@seoultelcom.com

Address : 28-3, Goean-dong, Sosa-gu,
Buchon-si, Gyeonggi-do, Korea

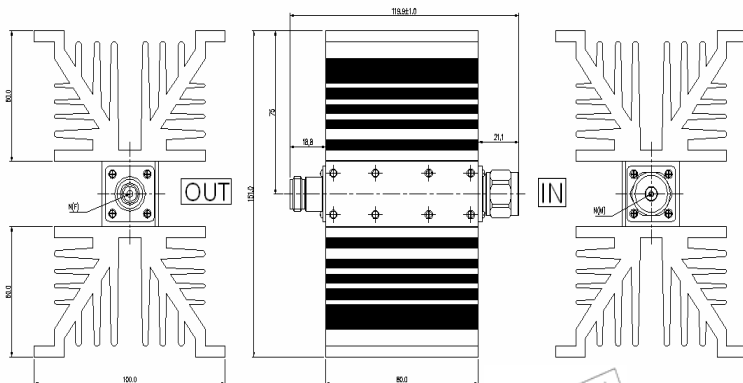

RoHS Complied